


S1-Bluetooth version Power meter socket

---User Manual---

AC85~265V 50/60HZ 10A/16A

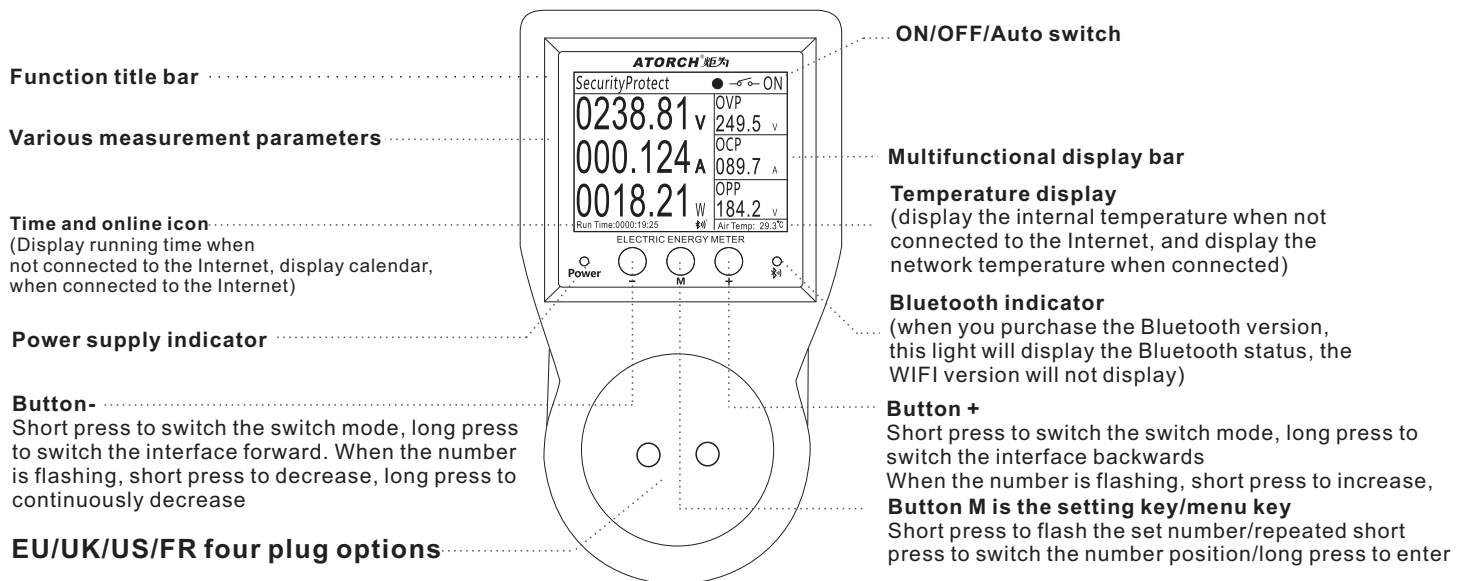

Specifications:

Model: S1B
Material: ABS + PC
Measuring voltage: AC85-265V
Measuring current: 0-16A Max16A
Power: MAX3680W
Energy Measurement range: 0 ~ 99999kWh
Accuracy: +1%
Wireless consumption: <0.3W
frequency: 50 / 60HZ
Power factor: 0-1.00PF
Working temperature: -20°C ~ +60°C
Working humidity: <80%
Security Type: WEP64 / WEP128 / TKIP / CCMP (AES)
Dimensions: 133X76X73mm
Screen Type: 2.4inch TFT-LCD HD Display Panel Graphic 240'RGB'320 Dot-matrix
Date function: month/day
Large screen measurement digital display function
*Remote control
*Timer function Socket
*Countdown function
*Over current Protection
*Over voltage protection
*Over Power protection
*Set the electricity unit price function/accumulate electricity bills
*Cycle timing function

Notes:

Please search for **E-test** name in Google Play
or **E-test** name in Apple Store Download app and install!
Support android 5.0 above app and IOS 8.0 above APP!
Be sure to turn on the phone's Bluetooth mode and GPS positioning

Plug type : EU plug / US plug / UK plug/FR plug / (optional)

EU plug type E: Primarily used in France, Belgium, Poland, Slovakia & Czechia
EU plug type F: Used almost everywhere in Europe & Russia, except for the UK & Ireland



Official website manual download

Mobile and computer APP software download address: <http://www.atorch.cn>